

State of North Dakota)
)ss
County of Burleigh)

I, Deb Kashur, do hereby certify that I am the duly-appointed Forensic Scientist for the State of North Dakota and an official custodian of the records and files of the office thereof, that I have carefully compared the

Ethanol Breath Standard Analytical Report, Lot No. 01215200A3, Expiration 02/05/2017

hereto attached with the respective original as the same appears of record on file at the Office of Attorney General, Crime Laboratory Division, in the County of Burleigh, North Dakota, and find the same to be a true and correct copy thereof and of the whole thereof. In witness whereof I have set my hand at the city of Bismarck, in said county this:

12 day of February, 2015


Deb Kashur
Deb Kashur, Forensic Scientist

State of North Dakota)
)ss
County of Burleigh)

On this 12 day of February, 2015, before me personally appeared Deb Kashur, known to me to be a Forensic Scientist for the State of North Dakota, and acknowledged to me that she has executed the same.

Subscribed to and sworn before me this:

12 day of February, 2015

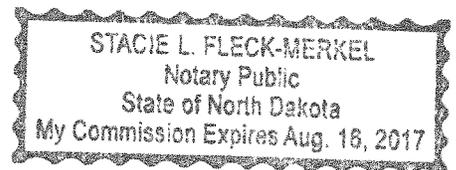

Stacie L. Fleck-Merkel
Stacie L. Fleck-Merkel
Notary Public, State of North Dakota
My Commission Expires August 16, 2017

(SEAL)

ETHANOL BREATH STANDARD ANALYTICAL REPORT

Ethanol Breath Standard Lot Number 01215200A3 Expiration Date 02/05/2017

This standard was analyzed by ILMO Specialty Gases with a reported result of 521 ppm which is the equivalent of 0.200 AC of Ethanol in Nitrogen. ILMO Specialty Gases has provided a Certificate of Analysis traceable to N.I.S.T. SRM Ethanol Standards.

A proper result for the standard test using a cylinder of this lot number would be the range of 0.190 to 0.210 g ethanol/210 L of vapor (g/100 ml of blood or g/210 L of end expiratory breath).

The Intoxilyzer® will print out the value of the standard test in 3 digits on Intoxilyzer® Test Record (Form 106-18000).

The number of cylinders sent to each location will be based on need. The standard may be used until the date of expiration as indicated by the manufacturer's Certificate of Analysis.

Deb Kashur
Deb Kashur, Forensic Scientist

12 Feb 2015
Date Approved



7 Eastgate Dr. • P.O. Box 790 • Jacksonville, IL 62651-0790
217-245-2183 • Fax: 217-243-7634 • www.ilmoproducts.com

Certificate of Analysis

Certificate ID: 7647
Part #: BAC105L200T
Cylinder Size: 105L
Lot Number: 01215200A3
Expiration: 2/5/2017

0.200 BAC (For the calibration of instruments used to determine breath alcohol concentration)

Contents: 105 Liters @ 1000 psig 70°F (21°C)

Component:	Concentration:	Accuracy:	Method:
Ethanol	521 ppm	+/- 0.002 or 2%	NDIR
Nitrogen	Balance	BAC whichever is greater	

*NIST Standard Reference Material
Cylinder No. CC14290 / Job No. 09160202
Certified 212.8 µmol/mol Ethanol in Nitrogen
for ILMO Products Co., Jacksonville, IL

Store in dry area, away from sources of heat, ignition
and direct sunlight. Do not allow storage area to
exceed 52 °C (125 °F).


Specialty Gas Lab Tech

01/20/15
Date

Distributed by: CMI Inc.
316 East Ninth Street
Owensboro, KY 42303
Phone 866-835-0690
www.alcoholtest.com





Corporate Office:

P.O. Box 790, 7 Eastgate Drive
Jacksonville, IL 62651
217-245-2183
Fax: 217-243-7634
www.ilmo-products.com

ISO/IEC
17025:2005
Accredited Laboratory

Certificate of Analysis

Customer CMI Calibration Laboratory, CMI Inc.
316 East Ninth Street, Owensboro, KY 42303

Item Description Ethanol Dry Gas Standard (Ethanol in Nitrogen)

Target Value 0.200 BAC

Lot Number 01215200A3

Manufacture Date January 12, 2015

Expiration Date February 5, 2017

Analysis Type/Test Method NDIR/DMT-1

Lot Average (ppm/BAC) 524.0/0.201

Lot Measurement of Uncertainty [+/- ppm/BAC] 4.7/0.0018

NTRM Information	
Batch#	09160202
Serial#	CC14290
Reported NIST Value (ppm)	212.8

Specialty Gas Analytical Lab Technician
ILMO Products Company

Date

* The stated expanded uncertainty was determined from the combined uncertainty associated with the following: calibration standard, equipment accuracy, repeatability and random variability (instrument readability). The uncertainty is expressed as $U = ku$, where u is the combined standard uncertainty and the coverage factor k is equal to 2, yielding a level of confidence of approximately 95%.

* The results on this report relate only to the items tested in the group of cylinders designated by the 'Lot Number' field.